
# **SWITCHCRAFT**®

# AC RECEPTACLES

## TYPES AC AND LAC

AC and LAC receptacles are intended for safe use in all critical electrical/electronic applications. "Chassis-hugging" recessed mounting is suited to all types of equipment. Receptacles have self-aligning feature that permits movement of pins Nos. 1 and 3 within the shell to compensate for any slight off-centering of mating plug contacts. Center pin, No. 2, is stationary and acts as a guide.



#### LISTINGS

* Part No.	LISTING U.L.	C.S.A.**
	7 A, 115 V 7 A, 115 V 7 A, 115 V 7 A, 115 V 7 A, 115 V	



## **MATING INFORMATION**

Part No.	Bolden *	Miller
AC3 AC3G LAC3 LAC3G LAC3GD	PH-243 PH-243 PH-95, PH-101 PH-104, PH-105, PH-163, PH-164 & 40258 CordSet.	350-1,350-2

<sup>\*</sup>Molded termination only.

Part No. AC3 3-pin, ungrounded.

Part No. AC3G 3-pin; center pin grounded to case.

⊕ Part No. LAC3 3-pin, ungrounded.

Part No. LAC3G 3-pin; center pin grounded to case.


Part No. LAC3GD 3-pin; center pin grounded to case. Center pin is .125-in. (3.18 mm) longer. Ground circuit is established before power circuits "make", and is maintained until after power circuits "break".

### MATERIAL SPECIFICATIONS

Shell: Steel, cadmium plated, chromate dipped.

Pins and Terminals: Brass, silver plated and chromate dipped.

Insulation: Epoxy paper No. 492, 94V O thermoplastic.

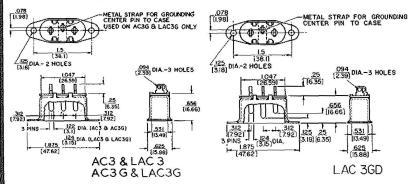

Available on special order only; contact Switchcraft for price and delivery.
NOTE: Contact your Switchcraft Representative for pricing.

<sup>\*</sup> U. L. No. E38829

<sup>\*\*</sup>C.S.A. Guide 365-E-1, Class 6233, File Card No. 27474