


TeleVideo 995-65 Terminal

High Performance Terminal With Flexibility

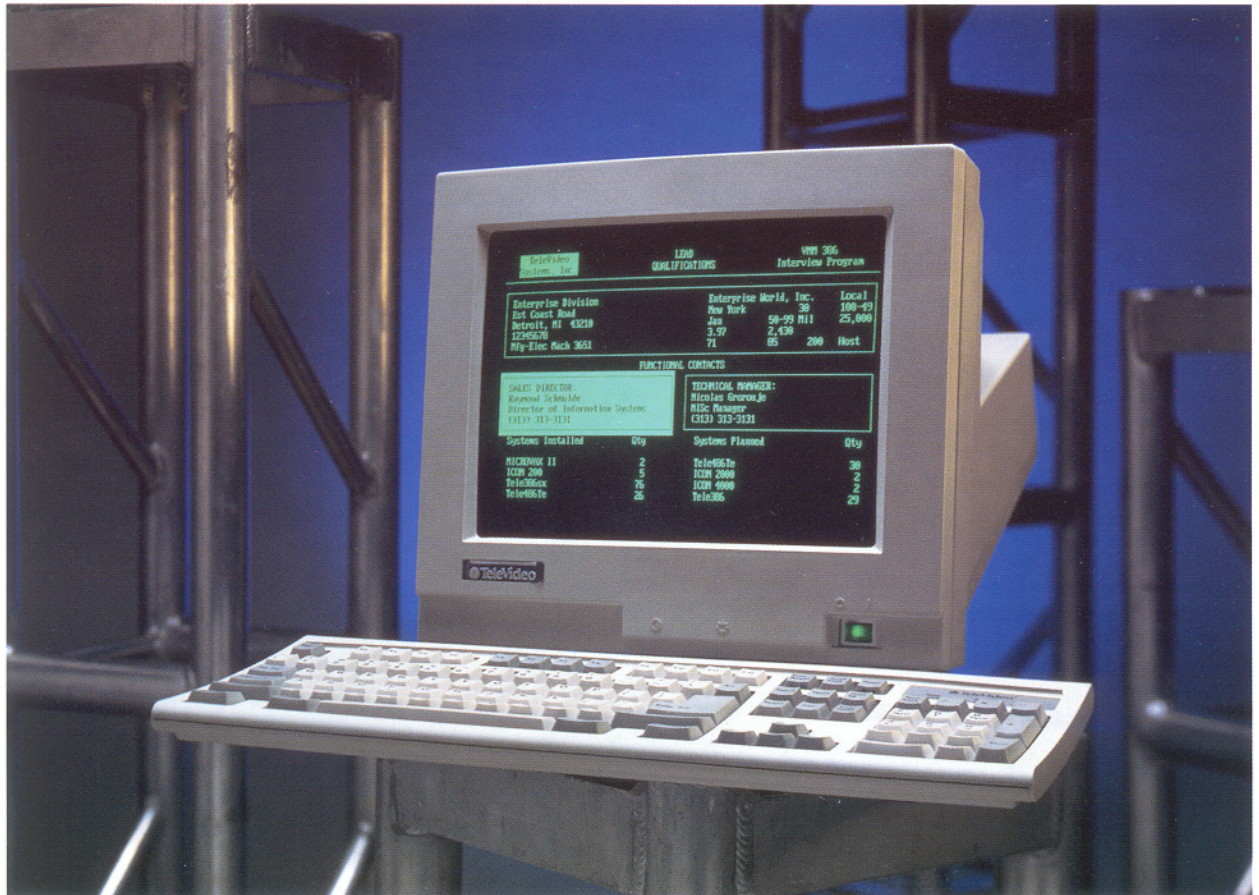

995-65 Key Features

- ◆ High-performance, ASCII, ANSI, PC Terminal
- ◆ Exceptional Reliability and Quality
- ◆ *Dual host terminal supporting copy and paste between hosts Concurrent Printing and Processing
- ◆ *Two serial communication ports each supporting 115.2 Kbaud
- ◆ Parallel printer port
- ◆ Borderless, overscanned video
- ◆ 60- or 80-Hz refresh rates
- ◆ 24, 25, 42, 43, 48 or 49 line display
- ◆ Three keyboard choices for ASCII, ANSI and PC terminal personalities
- ◆ Best terminal choice for platforms supporting terminals such as UNIX, Pick, or Concurrent DOS
- ◆ *IBM compatible keyboard interface for wedge type bar code scanner, wand reader, credit card reader, and/or specialized keyboards for point-of-sale and bank teller applications
- ◆ *40 KHz video for excellent readability
- ◆ Auto selecting power supply (90-270 VAC)
- ◆ Two board design for increased reliability
- ◆ *PS/2 mouse optional – Transmitted mouse code easily supported by existing application programs (some software modification required)
- ◆ The 995-65 has a power management screen saver to protect the environment and to promote energy conservation
- ◆ Low profile enclosure

With the special features the TeleVideo 995-65 terminals provide, you can meet your increased productivity goals into the 21st century. The TeleVideo 995-65 terminal is everything you hoped for and more.

Our philosophy is simple – design a high performance terminal that will provide functionality and increase productivity for many years to come.

Increased productivity – at an affordable price.

For more information, or to arrange a demonstration, call toll free 1-800-345-6050 for a TeleVideo Sales Office or a TeleVideo Authorized Reseller nearest to you.

 **TeleVideo**

*The Value and Performance
Leader in Terminals*

*Available only with TeleVideo terminals.

995-65 Specifications

Compatibility/Personalities

ASCII

TVI 905, 910/910+, 912/920, 925, 935, 950, 955, 965, 9065; Wyse 50, 50+, 60, 120, 150; ADDS A2, VP60, Regent 25; Lear Siegler ADM 2, 3A, 5, 31; Data General DG200/100; Hazeltine 1500; IBM 3101, 3151, 3161, QVT 101.

ANSI

DEC VT320/220, 100/52

SCO Console

PC Terminal

PC TERM

Display

CRT

High-resolution, flat, 14-inch, non-glare screen; 60 or 80 Hz refresh rate; green or white phosphor.

Video

Overscan (borderless)

Dual Host

Connection to two hosts, each supporting an independent, non-concurrent session.

Format (native mode)

80 or 132 columns

24, 25, 42, 43, 48, 49 data lines

Selectable status/message line

16 x 16 character cell

Display Memory

Up to 8 pages of dynamically allocatable memory

Character Sets

Resident character sets include ASCII, PC Multinational, DEC Special Graphics, DEC Multinational, ISO Latin, AlphaWindow Icon and Decorations, 13 Resident International Character Sets: U.S., U.K., French, German, Spanish, Norwegian, Danish, Finnish, Italian, Swedish, Swiss/German, Swiss/French and French-Canadian.

Visual Attributes

Selectable character based or embedded (line or page based) Normal, blink, blank, underline, reverse, full and half intensity, double high/double wide characters.

Cursor Attributes

Block, or underline; blinking or steady

Can also be disabled

Power Management Screen Saver

User-selectable time-out delays of 10, 20 or 30 minutes

Can also be disabled

Keyboard/Wedge Device Interface

IBM compatible keyboard interface for wedge type bar code scanner, wand reader, credit card and check readers, and specialized keyboards for point-of-sale, bank teller and other applications.

Keyboards

AT keyboard or European AT keyboard with your choice of U.S., U.K., German, French, Spanish, Italian, Danish or Swedish layouts.

ASCII: Low profile with two-position tilt typewriter style with sculptured keycaps. Inclined function key label area.

DEC style keyboard layout plus dedicated Esc, Backspace, Linefeed and 2 Alt keys. Set-up redefinable Backspace to Delete. 20 function keys, 20 (+20 shifted), programmable by the host or through set-up. Keyboards available in U.S., U.K., German, French, Spanish, Italian, Danish or Swedish layouts.

Mouse

PS/2 mouse optional

Communication

Main (user selectable):

com1 (DTE): RS-232, DB-25 female, supports up to 115.2 Kbaud

com2: RS-232, DB-9 male, supports up to 115.2 Kbaud

Parallel Printer

Centronics compatible DB-25 female connector

Parity

Odd, even or none

Word Structure

7- or 8-bit word

Communication Modes

Conversational (full/half duplex), local, block, monitor

Print Capability

Buffered/copy/transparent, bidirectional, secondary and page print

Additional Features

User-friendly windowed set-up menu
Smooth scroll

Environmental Specifications

Temperature

Operating:

32° F (0° C) to 113° F (45° C)

Storage:

-40° F (-40° C) to 149° F (65° C)

Relative Humidity

Operating:

10% to 85% noncondensing

Storage:

10% to 85% noncondensing

Power Requirement

90-270 VAC, 47-63 Hz autosensing power supply

Physical

Display Console

12.8"H x 12.8"W x 13"D
(32.5 x 32.5 x 33.0 cm)

Keyboard

AT Keyboard

1.5"H x 18.2"W x 6.5"D
(3.9 x 46.2 x 16.5 cm)

DEC Style VT-320

1.5"H x 19.5"W x 7.2"D
(3.8 x 49.5 x 18.2 cm)

ASCII

1.5"H x 17.8"W x 7.2"D
(3.8 x 45.1 x 18.2 cm)

Weight

19 pounds (8.6 kg)

Regulatory Compliance

FCC Class A, UL, CSA
TUV-GS (ZH1/618),
VDE 0871B, MPRII (selected models)

Options

RS 422 and current loop

Specifications are subject to change by TeleVideo without notice and are not intended as a guarantee or warranty.

Brand names and product names are trademarks or registered trademarks of their respective companies.

For more information, contact your nearest TeleVideo regional sales office: California/San Jose 408-954-8333, Illinois/Schaumburg 708-397-5400, Europe/Pacific/Africa/Latin America 408-954-8333

TeleVideo, 2345 Harris Way, San Jose, CA 95131, 408-954-8333, Fax 408-954-0622

LIT DS 990 @ TeleVideo 10/94. Printed in U.S.A. To order packets of 100 use LIT KIT DS 990-100.